


Flushbolt & Strike
CUTOUT DETAILS



**For the KE35-1, KE36-1, KE37-1 AND
KE38-1 Door Edge Guards**

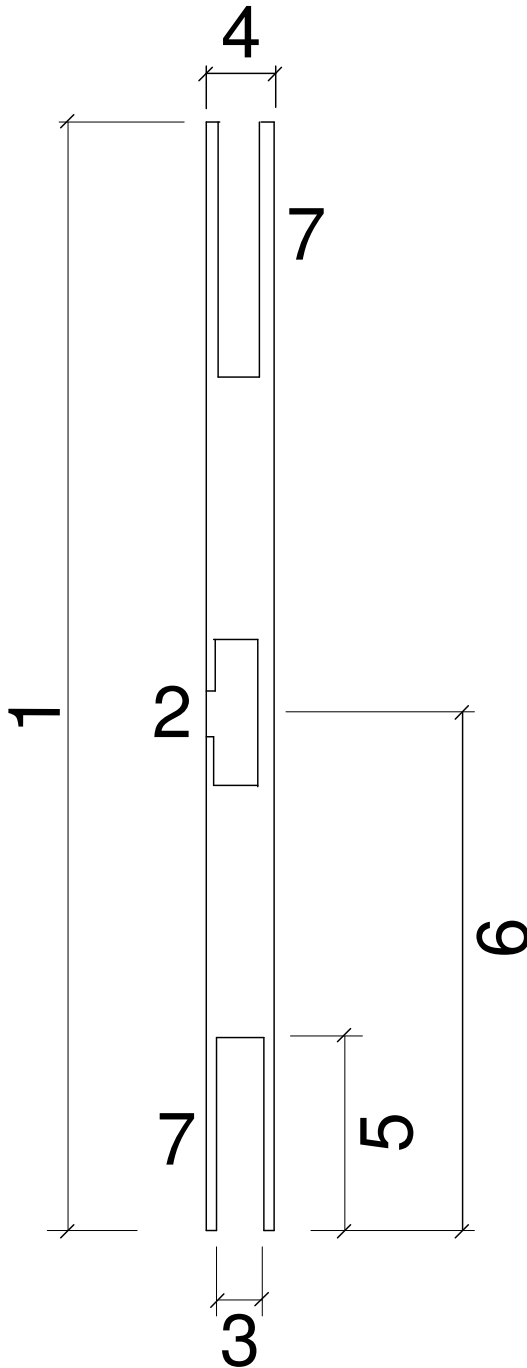

Drawing No.:
Date of Drawing:
SO No.:
PO No.:

Customer Name:
Approved by (signature):

Print name:
Date of Approval:

Dimensions:

1. Overall Length:
2. Type of Strike:
3. Width of Flushbolt (1" standard):
4. Width of Leg if not
1-11/16" OD +/-:
5. Bottom Edging to top of
Flushbolt:
6. Bottom of Edging to centerline of
Strike:
7. Part Number of Flushbolt:

The Flushbolt cutout will be centered in
the leg unless otherwise specified.

Notes:

- All dimensions have a tolerance of +/- 1/16".
- Bend angle has a tolerance of +1°
- Locations of hardware to be measured from the bottom of the edge guard to the locations indicated.
- Unless otherwise specified, all screws are located on all sides of the edges and not on the cutout face.
- Unless otherwise specified these are supplied with #5 x 1/2" stainless steel, Phillips, Flat head sheet metal screws plated to match finish.

For Office Use Only

Work Order No.: _____
Inspected by: _____
Supervisor Checked: _____